

# RF3 SCR SERIES

## POWER CONTROLS

The RF3 SCR Series are three-phase (6 SCR), phase-fired SCR Power Controls designed to deliver maximum power control with all of the features normally found in much larger units. Utilizing only four frame sizes, these units are conservatively engineered for years of trouble free service while providing the benefits of precise, reliable control of for your electronic process.

The PF3 SCR Series accepts all standard voltage and current command signals or remote potentiometer input. The 4-20 mA command signal is optically isolated. Standard operating voltages are 120, 240, 400, 480 & 575 Vac, 3 Phase, 50/60Hz.

Multi-turn Zero and span adjustments are provided for matching the SCR power control to the command signal. Control power, command signal and blown fuse indicators are provided as means for trouble shooting. The control power indicator (red) indicates power has been applied to the unit. The command signal indicators' (green) brilliance is proportional to the output voltage. The blown fuse indicators (3-yellow) light if a fuse is cleared.

### Applications


Primarily used to control transformer coupled RF loads.

**30-1200 Amperes  
Three-phase  
Phase-fired**




- 5 year "No Hassle" warranty
- Electrically Isolated Heatsink (30-225 A)
- Compact Size
- Conservative Thermal Design
- Voltage Squared Linearity
- Line voltage compensation
- Transient voltage Protection (RC & MOV)
- 1400 PIV SCRs
- Semiconductor (I<sup>2</sup>T) Fuse
- Diagnostic Indicators
- Optically Isolated input Command Signal (4-20 mA)
- Multi-Turn Zero & Span Adjustments
- Fan Cooled (90 A and higher)
- Over current trip included

## RF3 30 - 225 A

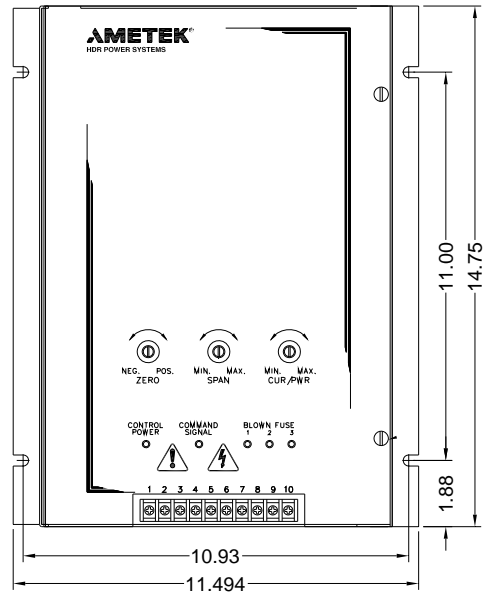


Depth: 9.5 in  
Weight: 33 lbs

## RF3 350 - 500 A

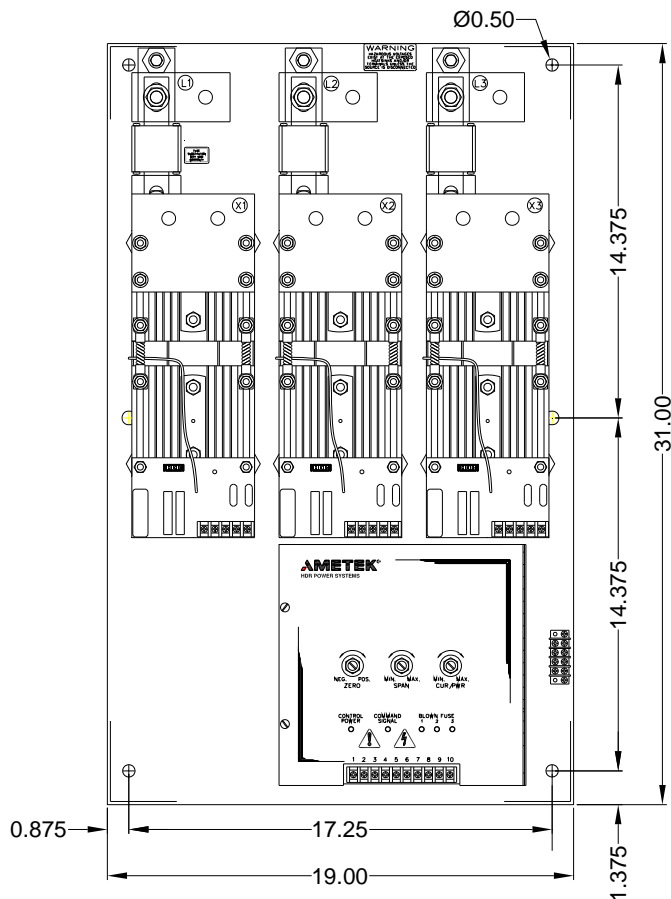


Depth: 8.5 in  
Weight: 60 lbs

**RF3 500 - 650 A**

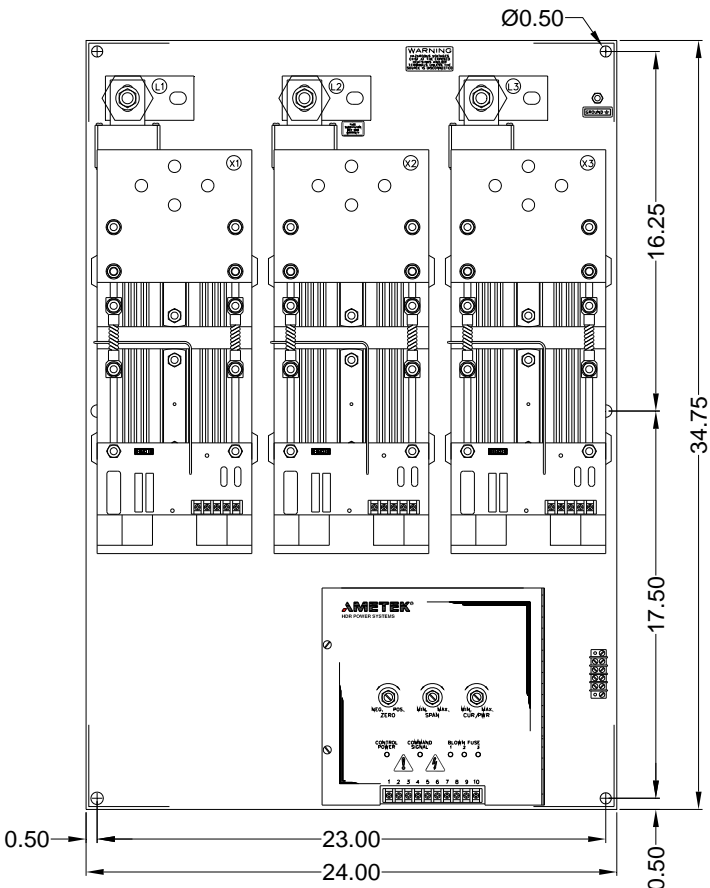

Depth: 11.25 in  
Weight: 126 lbs

**RF3 800 - 1200 A**

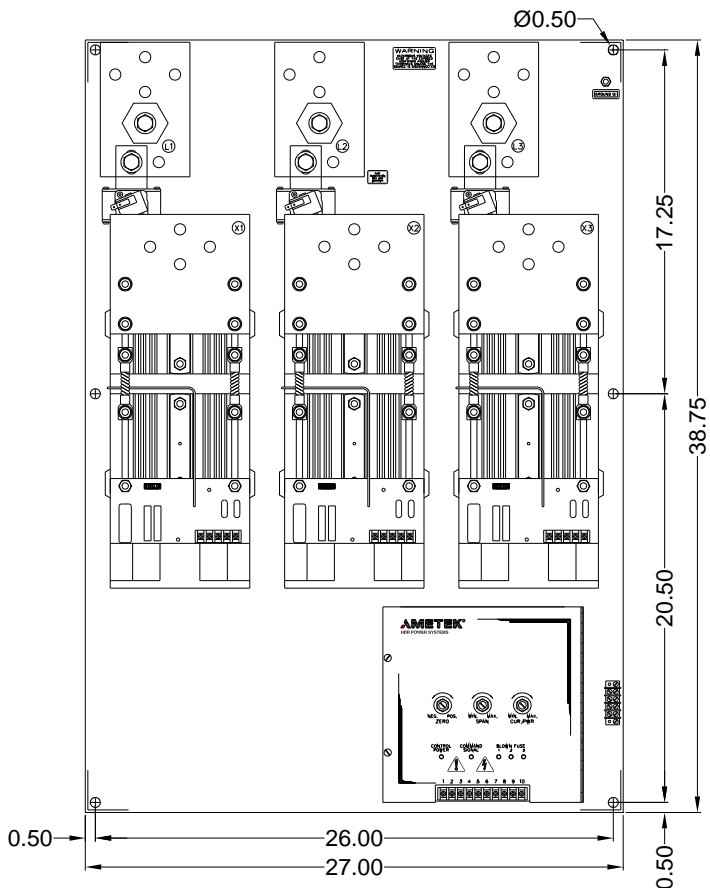

Depth: 11.75 in  
Weight: 231 lbs

## SPECIFICATIONS:

**Control Method:** Phase-firing of six back-to-back SCRs (3-leg control)

**Voltage Rating:** 120, 240, 400, 480, 575 Vac

**Line Frequency:** 50 / 60 Hz

**Current Ratings:** 60, 90, 120, 180, 225, 350, 500, 650, 800, 1000, 1200 Amperes

**Command Signal:** Most standard process signals

**Linearity:** Output is linear within 2% of span over entire range of control

**Adjustments:** Zero and Span, multi-turn

**Isolation:** 2500 volts rms from power circuit to command signal and to ground

**Overtemp Protection:** Heatsink thermostat provided on 90 A and higher models


**Ambient Temperature:** Operating: 0 °C to 50 °C

**Relative humidity:** 0 to 95% (non-condensing)

## HOW TO ORDER:

Make a selection from each of the tables below. Place the selection in the corresponding boxes to build your model.

RF3 -  -  -  -

VOLTAGE*		CURRENT		OPTIONS		COMMAND					
120 Vac	<input type="text" value="120"/>	30 A	<input type="text" value="30"/>	N.O. Thermostat ◇	<input type="text" value="NO"/>	4-20 mA	<input type="text" value="01"/>				
240 Vac	<input type="text" value="240"/>	60 A	<input type="text" value="60"/>	N.C. Thermostat ◇	<input type="text" value="NC"/>	0-10 Vdc	<input type="text" value="02"/>				
400 Vac	<input type="text" value="400"/>	90 A	<input type="text" value="90"/>	Lug Kit (< 225 A)	<input type="text" value="LG"/>	0-5 Vdc	<input type="text" value="03"/>				
480 Vac	<input type="text" value="480"/>	120 A	<input type="text" value="120"/>	Fuse Kit	<input type="text" value="FK"/>	Auto/Manual	<input type="text" value="04"/>				
575 Vac	<input type="text" value="575"/>	180 A	<input type="text" value="180"/>	Multiple options may be selected 		Manual Pot Input <sup>^</sup>	<input type="text" value="05"/>				
		225 A	<input type="text" value="225"/>			◇ Thermostat included above 60 A, specify N.O. or N.C.		Others	<input type="text" value="06-99"/>		
		350 A	<input type="text" value="350"/>								
		500 A	<input type="text" value="500"/>								
		650 A	<input type="text" value="650"/>								
		800 A	<input type="text" value="800"/>								
		1000 A	<input type="text" value="1000"/>								
		1200 A	<input type="text" value="1200"/>								

\* Other voltages available

<sup>^</sup> Manual Pot requires external potentiometer (5 kΩ)